

Lot 344 Arbor Green

Stage 4, Arbor Green, Springwood, Rolleston



Artist impression only – refer to concept plan.

House & Land Package:

Family sized home featuring three bedrooms, master with ensuite, open plan kitchen living and dining, family bathroom and internal access garaging. Well appointed for the sun on a fully landscaped section, offering quality fixtures and fittings throughout.

\$679,900

Home area: 119m²

Section area: 321m²




Features:

- Turnkey
- Master Build 10-Year Guarantee
- 1 year warranty period
- Healthy Homes compliant
- RibRaft foundation
- Modern bathroomware
- Custom kitchen cabinetry
- Tri-Stone benchtop
- Window coverings
- Fully landscaped

P: (03) 977 2832

E: info@oakridgehomes.co.nz
oakridgehomes.co.nz

Floor Layout

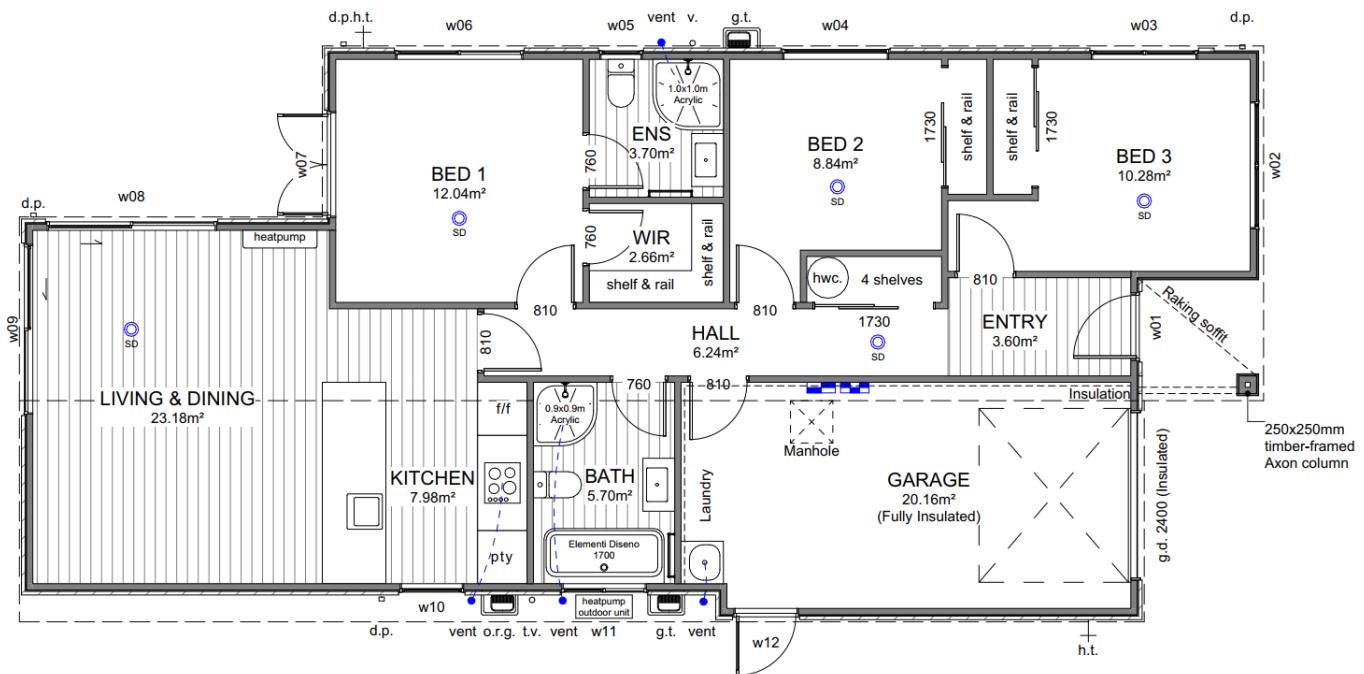

Specification

General			
Guarantee:	Master Build 10-Year	Insurance:	Builders All Risk
Warranty	1 year from settlement	Utilities:	Mains supply including fibre
Dwelling Exterior			
Foundation:	TC1 RibRaft	Framing / trusses:	2.42m LVL
Roofing:	10° & 15° longrun corrugate	Fascia and gutter:	Dimond metal fascia and quad gutter
Downpipes:	Colorsteel 75x55 rectangular	Main cladding:	Rockcote Graphex (15yr manufacturers guarantee)
Feature cladding:	James Hardie Axon	Entry door:	APL 860mm Latitude with urbo lever
Window joinery: Tint to w02 & w03	Low E Argon filled double glazed windows in thermally-broken powder coated aluminium frames	Garage door:	Insulated Coloursteel flat panel woodgrain 2.4m
Dwelling Interior			
Insulation:	As per Building Code. Including entire garage envelope - internal & external walls	Plasterboard:	Plasterboard - 10mm to walls, wet area to bathrooms and 13mm to ceilings
Gib stopping:	Grade 4 paint finish in accordance with AS/NZ 2311:2009	External corners:	Square stop
Hinged doors:	1980mm (horizontal V groove)	Wardrobe sliders:	2200mm Horizontal V groove
Wardrobe shelving:	MDF shelf and rail	Cupboard shelving:	MDF shelves x4
Door hardware:	Windsor Futura – Apex brushed nickel	Skirting board:	60mm bevel
Electrical:	As per plan	Heatpump:	Fujitsu SET-ASTH22KNTA 6.0/6.5kw
Extractor:	Inline extractor fan & extractor duct through soffits/fascia grille	Hot water cylinder:	Rheem 250L
Carpet:	Belgotex Urban Twist	Vinyl plank:	Belgotex Luxury Plank – Province
Kitchen, bench surface and splashback:	Custom made Melteca or Bestwood finished cabinetry. TriStone 30mm square edge benchtop. Tiled splashback full length of back bench/wall.	Window coverings:	Windoware Everyday Vinyl Collection – Mystic. Excluding garage & bathrooms
Landscaping			
Driveway and patio:	Exposed aggregate – sealed	Vehicle crossing:	Included
Soft landscaping:	As per plan	Fencing:	As per plan

P: (03) 977 2832

E: info@oakridgehomes.co.nz
oakridgehomes.co.nz

Specification

Kitchen and Laundry *Refer to plans and colour scheme

Kitchen tapware:

Elementi Uno Gooseneck



Kitchen sink:

Lazio NZLSS-5545 single stainless steel sink



Oven:

Bosch HBF133BSOA



Kitchen handles:

Stefano Orlati 4062— Titanium



Powerpack:

Bosch DHL755BAU



Ceramic cooktop:

Bosch PKE611K17A



Laundry tub:

Aquatica Laundra Studio



*dependent on supply, similar fitting to be used if unavailable

Dishwasher:

Bosch SMU2ITS01A



Bathrooms

Vanities:

Elementi Novara, 2 drawer 750mm, French Oak



Mirrors:

Polished edge direct fix—1000×750mm



Showers:

Arena curved with moulded wall



Toilets:

Elementi Uno back to wall



Bath:

Elementi Diseno back-to-wall 1700mm



Towel rails:

Newtech 5 bar square—heated



Basin mixers:

Elementi Cura



Shower / bath mixers:

Elementi Cura



Shower slides:

Elementi Rayne



Bath spout:


Elementi Uno



Colour Schedule



Exterior Colours

Colour Scheme			
EXTERIOR			
Roof:	Ebony	Garage door:	Ebony
Fascia, gutter & downpipes:	Ebony	Garage door frame:	Ebony
Window joinery:	Ebony	Soffits:	Half black white
Front door:	Ebony	Exterior cladding (Main):	Mid grey
Front door frame:	Ebony	Exterior cladding (Feature):	All black





Interior Colours

Colour Scheme			
INTERIOR			
Ceilings:	Half black white	Kitchen benchtop:	TriStone 30mm – Demeter
Walls:	Black white	Kitchen back wall & island back panel:	Cirrus
Interior doors:	Black white	Kitchen front island panel & boxed ends:	Fiordland elm
Skirting:	Black white	Kitchen splashback:	Zellige Argilla Gloss 100x100
Carpet:	Iron	Feature pendant:	Minota 1.5 linear black
Vinyl plank:	Natural		



P: (03) 977 2832

E: info@oakridgehomes.co.nz
oakridgehomes.co.nz

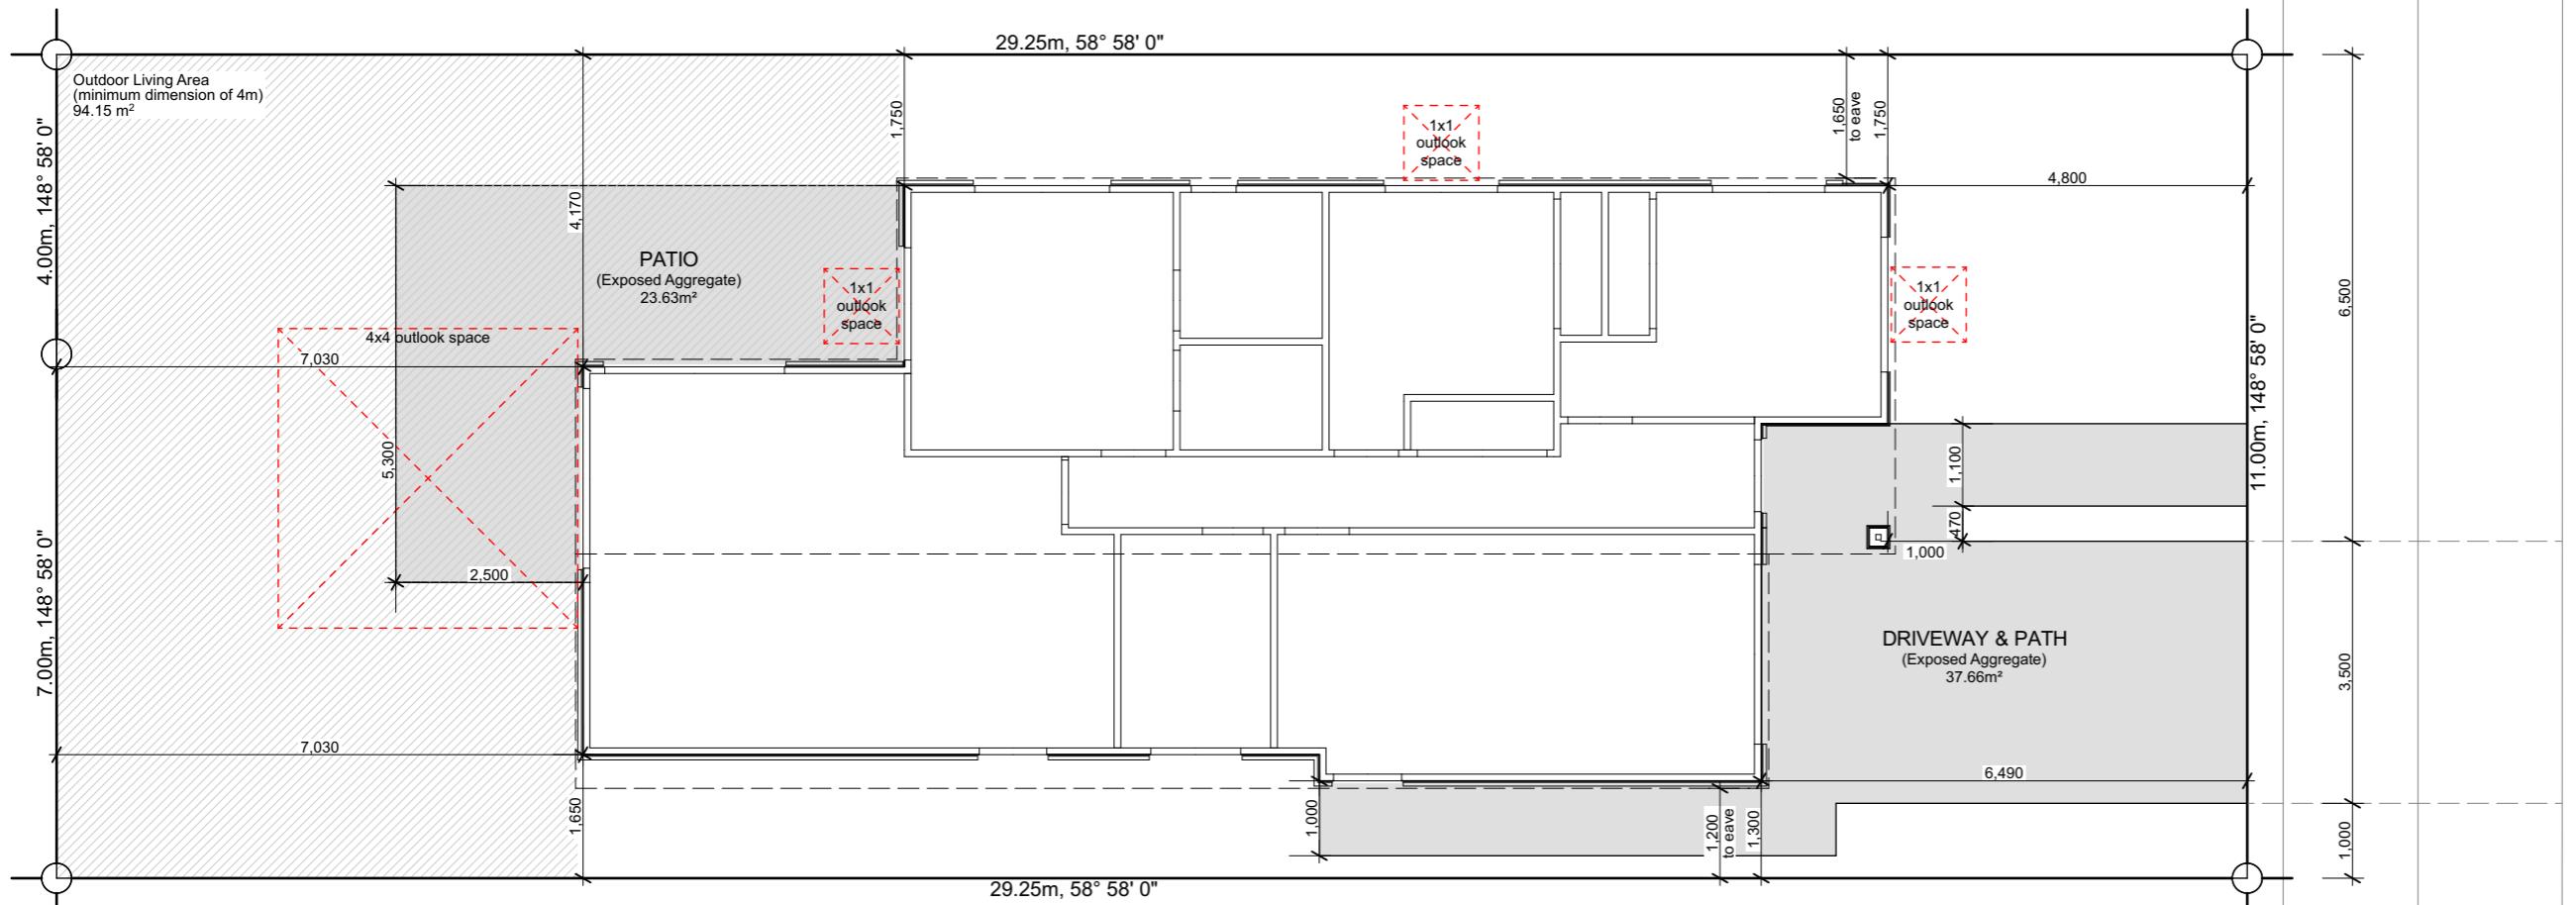

Site Info

Site Address	20 Estival Drive Rolleston
Legal Description	Lot 344 DP 624732
Site Area	321m ²
Building Area	119.95m ²
Roof Area*	133.86m ²
Site Coverage	41.70%

Design Basis

Wind Zone	High
Earthquake Zone	2
Snow Zone	N4 < 100m
Exposure Zone	C

General Notes

All dimensions shown are to face of foundation unless noted otherwise.

Refer to Foundation Plan for foundation setout.


Refer to Drainage Plan for specific drainage info.

Refer to Sediment Control in Specification & implement where required.

Driveway stormwater runoff to road when it does not flow over a footpath. Otherwise driveway stormwater runoff to be collected and disposed via soak pit located within property.

All sealed driveway and patio areas to be min. 1:100 fall away from building.

ESTIVAL DRIVE



Building Area

Over Frame	116.61m ²
Perimeter	50.74m
Over Cladding	119.95m ²
Perimeter	51.22m
Roof Area*	133.86m ²
Perimeter	52.30m
*Roof area includes fascia & gutter.	

General

Main Cladding	RCS Graphex
Feature Cladding	James Hardie Axon Panel
Roof Pitch	10° & 15°
Roofing	Longrun Corrugated
Stud Height	2.42m
Interior Door	1.98m high
Wardrobe Door	2.20m high
Cooktop	Ceramic Cooktop

Note 1: Kitchen layout indicative only, refer to Kitchen Design for details.

Note 2: Ensuite extractor fans ducting through fascia grille.

Note 3: Tint window to w02 & w03.

Legend


	Distribution Board and Smart Meter Box
	Data Box
	Smoke Detector 10 year long-life battery-operated & interconnected

Floor Covering

	Carpet (excl. Garage)
	Vinyl Planks

WINDOW SCHEDULE

ID	H	W
w01	2,130	960
w02	2,130	1,800
w03	500	1,500
w04	1,400	1,500
w05	1,100	600
w06	500	1,800
w07	2,130	1,500
w08	2,130	2,400
w09	2,130	2,400
w10	2,130	900
w11	1,100	1,200
w12	1,100	1,200
w13	2,130	900
w14	2,130	900
w15	2,130	900
w16	2,130	900
w17	2,130	900
w18	2,130	900
w19	2,130	900
w20	2,130	900
w21	2,130	900
w22	2,130	900
w23	2,130	900
w24	2,130	900
w25	2,130	900
w26	2,130	900
w27	2,130	900
w28	2,130	900
w29	2,130	900
w30	2,130	900
w31	2,130	900
w32	2,130	900
w33	2,130	900
w34	2,130	900
w35	2,130	900
w36	2,130	900
w37	2,130	900
w38	2,130	900
w39	2,130	900
w40	2,130	900
w41	2,130	900
w42	2,130	900
w43	2,130	900
w44	2,130	900
w45	2,130	900
w46	2,130	900
w47	2,130	900
w48	2,130	900
w49	2,130	900
w50	2,130	900
w51	2,130	900
w52	2,130	900
w53	2,130	900
w54	2,130	900
w55	2,130	900
w56	2,130	900
w57	2,130	900
w58	2,130	900
w59	2,130	900
w60	2,130	900
w61	2,130	900
w62	2,130	900
w63	2,130	900
w64	2,130	900
w65	2,130	900
w66	2,130	900
w67	2,130	900
w68	2,130	900
w69	2,130	900
w70	2,130	900
w71	2,130	900
w72	2,130	900
w73	2,130	900
w74	2,130	900
w75	2,130	900
w76	2,130	900
w77	2,130	900
w78	2,130	900
w79	2,130	900
w80	2,130	900
w81	2,130	900
w82	2,130	900
w83	2,130	900
w84	2,130	900
w85	2,130	900
w86	2,130	900
w87	2,130	900
w88	2,130	900
w89	2,130	900
w90	2,130	900
w91	2,130	900
w92	2,130	900
w93	2,130	900
w94	2,130	900
w95	2,130	900
w96	2,130	900
w97	2,130	900
w98	2,130	900
w99	2,130	900
w100	2,130	900
w101	2,130	900
w102	2,130	900
w103	2,130	900
w104	2,130	900
w105	2,130	900
w106	2,130	900
w107	2,130	900
w108	2,130	900
w109	2,130	900
w110	2,130	900
w111	2,130	900
w112	2,130	900
w113	2,130	900
w114	2,130	900
w115	2,130	900
w116	2,130	900
w117	2,130	900
w118	2,130	900
w119	2,130	900
w120	2,130	900
w121	2,130	900
w122	2,130	900
w123	2,130	900
w124	2,130	900
w125	2,130	900
w126	2,130	900
w127	2,130	900
w128	2,130	900
w129	2,130	900
w130	2,130	900
w131	2,130	900
w132	2,130	900
w133	2,130	900
w134	2,130	900
w135	2,130	900
w136	2,130	900
w137	2,130	900
w138	2,130	900
w139	2,130	900
w140	2,130	900
w141	2,130	900
w142	2,130	900
w143	2,130	900
w144	2,130	900
w145	2,130	900
w146	2,130	900
w147	2,130	900
w148	2,130	900
w149	2,130	900
w150	2,130	900
w151	2,130	900
w152	2,130	900
w153	2,130	900
w154	2,130	900
w155	2,130	900
w156	2,130	900
w157	2,130	900
w158	2,130	900
w159	2,130	900
w160	2,130	900
w161	2,130	900
w162	2,130	900
w163	2,130	900
w164	2,130	900
w165	2,130	900
w166	2,130	900
w167	2,130	900
w168	2,130	900
w169	2,130	900
w170	2,130	900
w171	2,130	900
w172	2,130	900
w173	2,130	900
w174	2,130	900
w175	2,130	900
w176	2,130	900
w177	2,130	900
w178	2,130	900
w179	2,130	900
w180	2,130	900
w181	2,130	900
w182	2,130	900
w183	2,130	900
w184	2,130	900
w185	2,130	900
w186	2,130	900
w187	2,130	900
w188	2,130	900
w189	2,130	900
w190	2,130	900
w191	2,130	900
w192	2,130	900
w193	2,130	900
w194	2,130	900
w195	2,130	900
w196	2,130	900
w197	2,130	900
w19		



Roof Cladding

10° & 15° Colorsteel corrugate roofing over Thermakraft 215 roof underlay.

Fascia & Gutter


Colorsteel Quad gutter supported on 185mm Colorsteel fascia.

Downpipes

75x55mm Colorsteel downpipes with wall brackets.

Roof Penetrations

Seal all pipe penetrations with Dektite flashing kit as per specification.

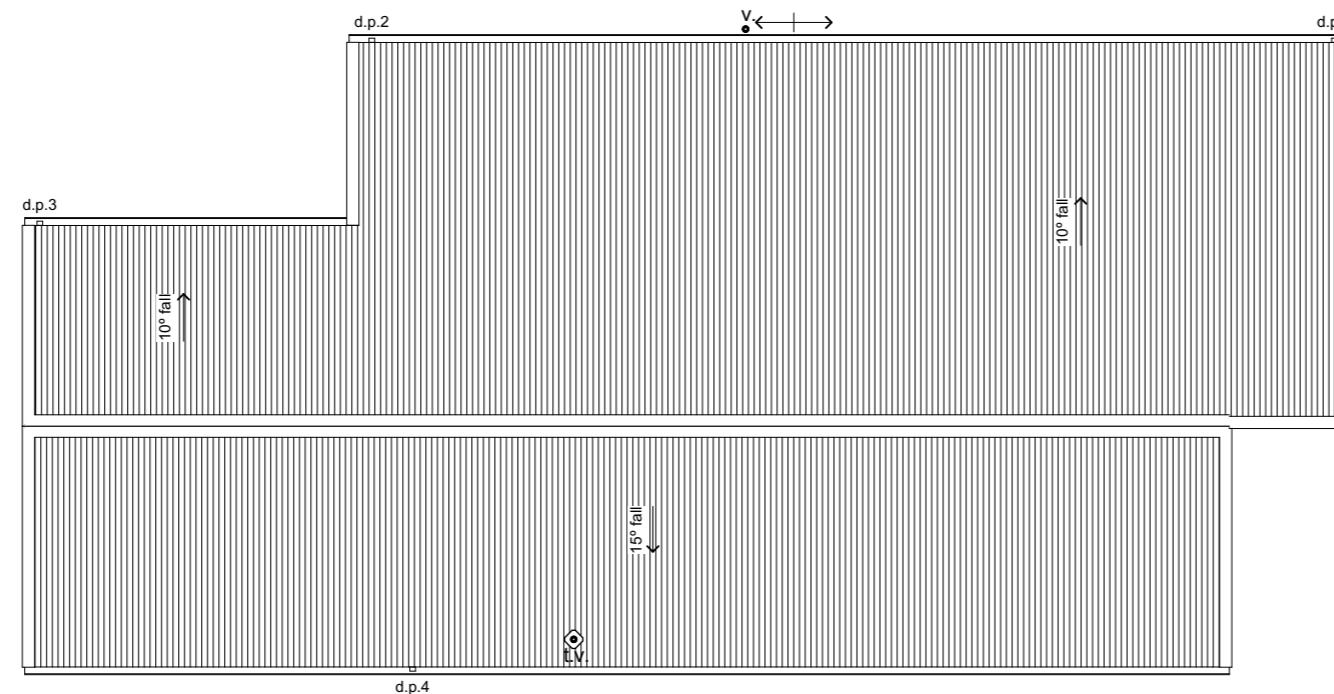


Downpipe Catchment (Plan Area)


d.p.1	37m ²
d.p.2	29m ²
d.p.3	11m ²
d.p.4	50m ²

Roof Bracings


Refer to truss design.

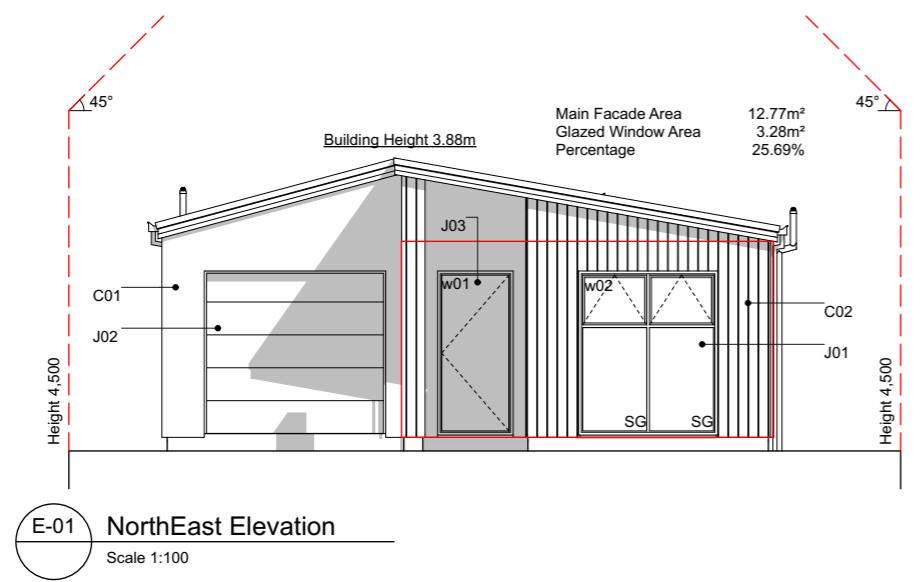


E-01 NorthEast Elevation
Scale 1:100

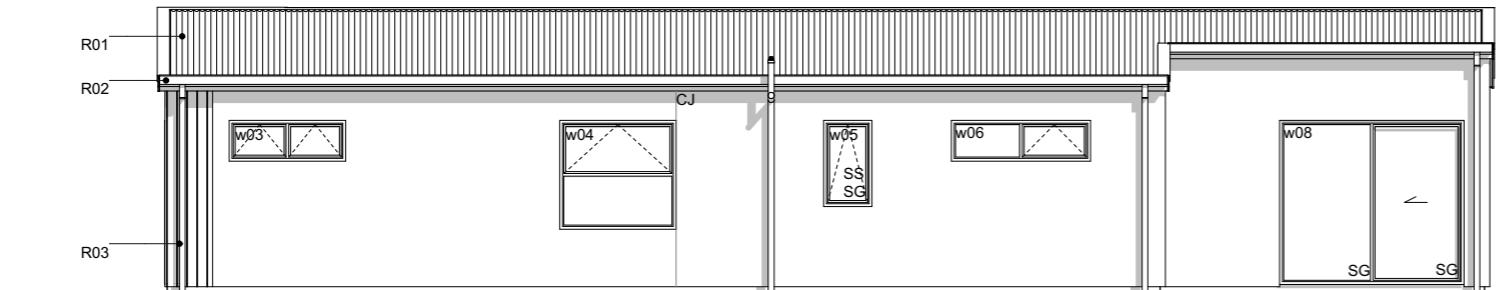

E-02 NorthWest Elevation
Scale 1:100

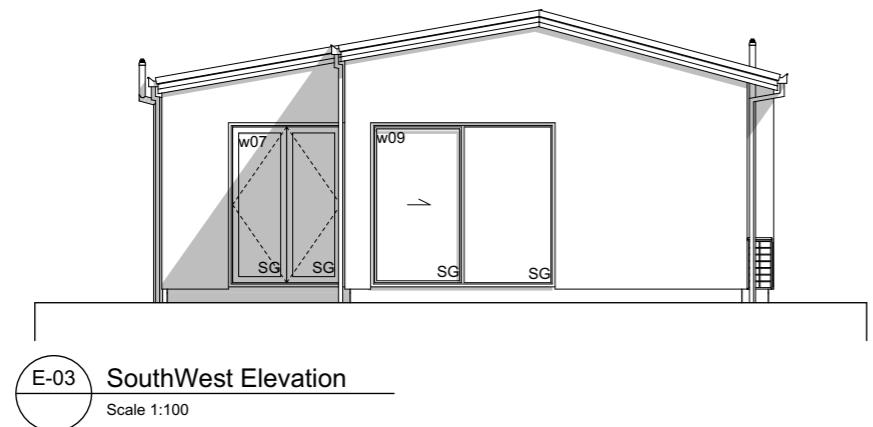

E-03 SouthWest Elevation
Scale 1:100

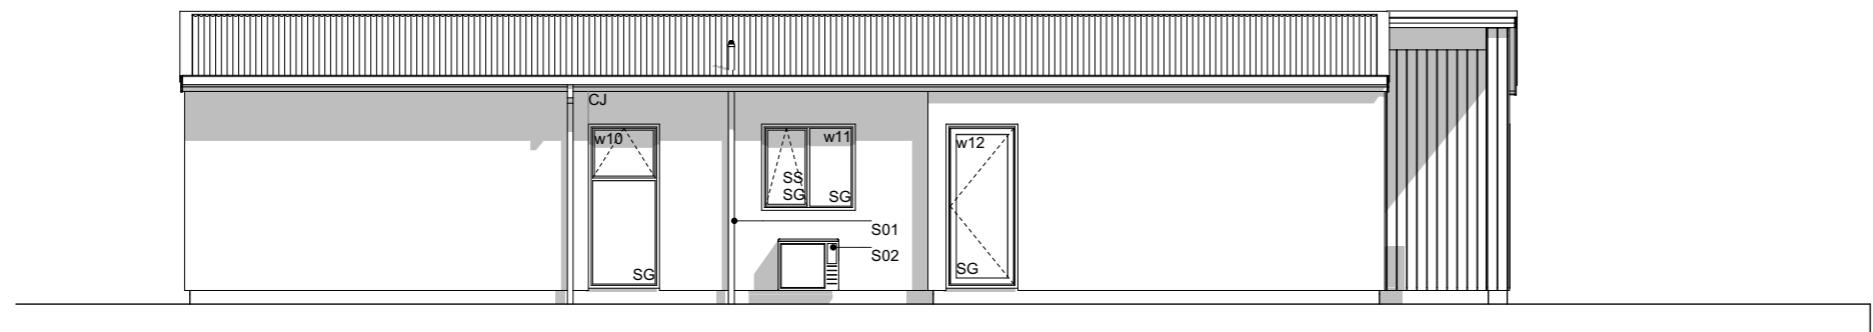

E-04 SouthEast Elevation
Scale 1:100

Elevation Keys

- C01 RCS Graphex 50mm panel with plastered finish on 20mm cavity battens.
- C02 James Hardie Axon panel on 20mm cavity battens.
- R01 Colorsteel corrugate roofing.
- R02 Colorsteel Quad gutter supported by Colorsteel 185mm fascia.
- R03 Colorsteel 75x55mm downpipes.
- J01 Low E Argon filled double glazed windows in thermally-broken powder coated aluminium frames.
- J02 Sectional garage door.
- J03 APL entry door in thermally-broken powder coated aluminium frames.
- S01 Drainage vent pipe.
- S02 Heatpump outdoor unit on wall bracket.


Legend

- w01 Window ID
- SS Security Stay
- SG Safety Glass
- CJ Control Joint

General Notes

Driveway to fall from 20mm max. below garage rebate.

Section Keys

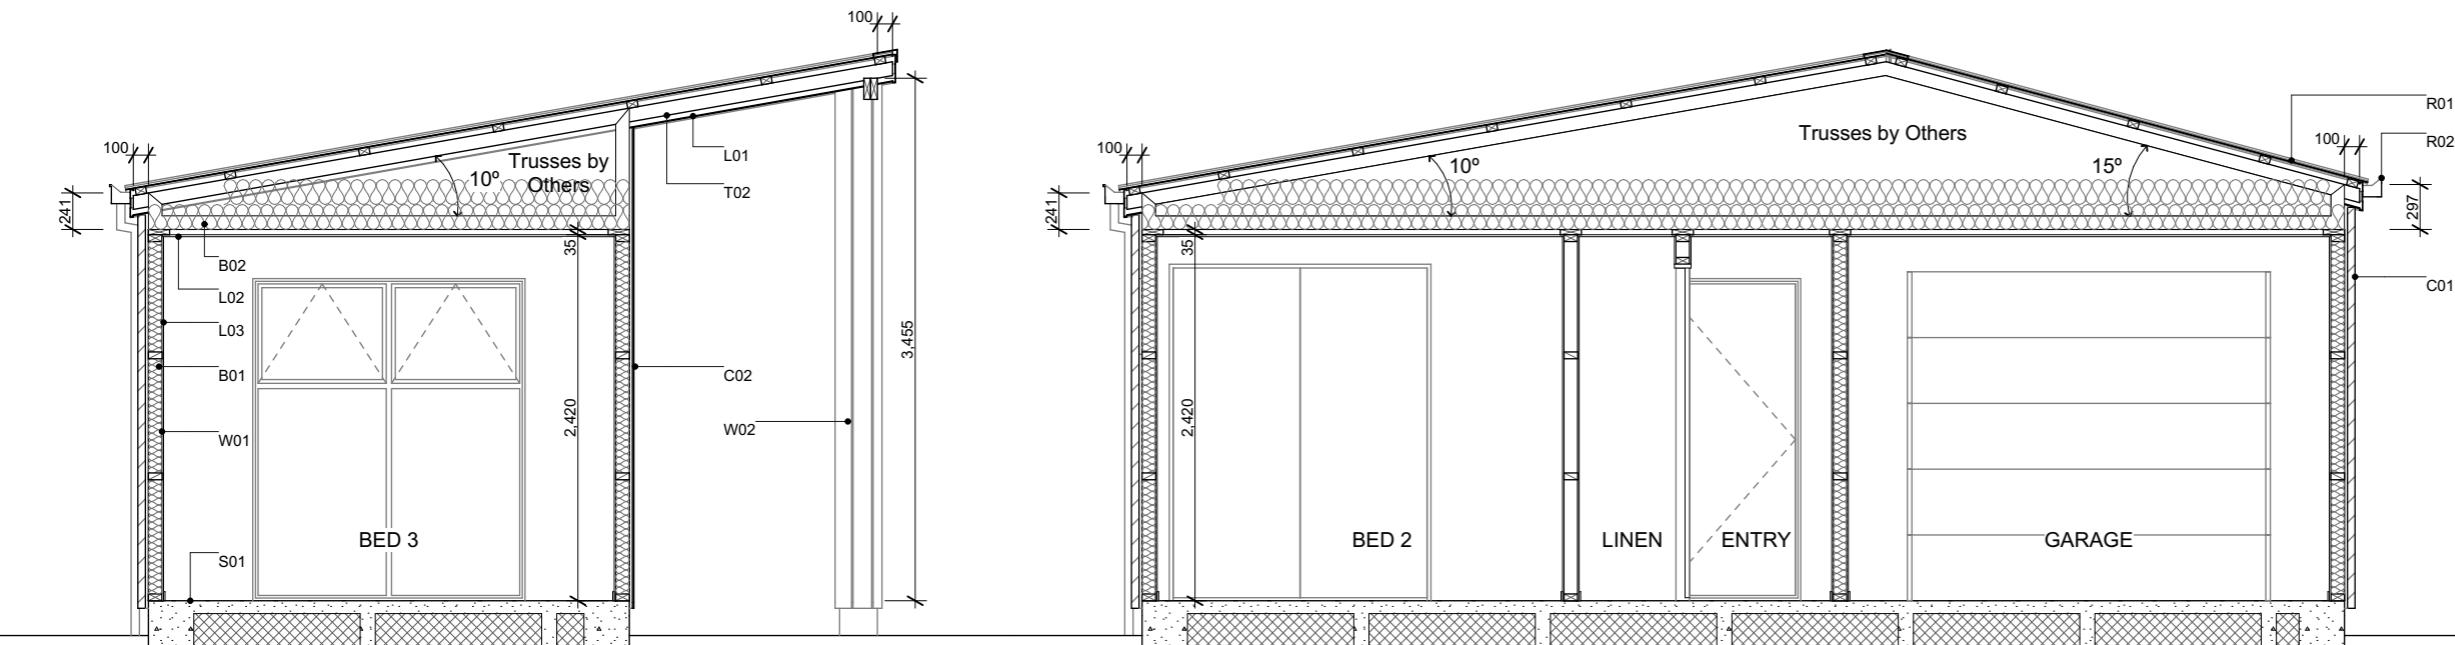

A Section A-A
Scale 1:50

B Section B-B
Scale 1:50

C01 RCS Graphex 50mm panel with plastered finish on 20mm cavity battens over building underlay on timber framing.

C02 James Hardie Axon panel on 20mm cavity battens over building underlay on timber framing.

W01 External walls 90x45mm studs @ 600mm crs, dwangs @ 800mm crs. Top plates 90x45 + 140x35mm.

W02 External walls 2/90x45mm studs @ 300mm crs, dwangs @ 800mm crs.

W03 Internal walls 90x45mm studs @ 600mm crs, dwangs @ 800mm crs.

S01 Ribraft floor slab and foundation.

T01 Roof trusses as per Truss Design.

T02 Extended truss top chords / purlins to form raking soffit.

R01 Colorsteel corrugate roofing over self-supported roof underlay on 70x45mm purlins on trusses.

R02 Colorsteel Quad gutter on Colorsteel fascia.

R03 75x55mm Colorsteel downpipes with wall brackets.

J01 Low E Argon filled double glazed windows in thermally-broken powder coated aluminium frames. H3.1 timber reveals for painted finish.

J02 Sectional garage door. H3.1 timber reveals for painted finish.


B01 R2.6 wall insulation batts.

B02 2 x R3.6 (165mm) double layer ceiling insulation batts. One layer around perimeter where double layer won't fit.

L01 4.5mm soffit linings for painted finish.

L02 13mm Gib ceiling linings supported by 35mm Rondo ceiling battens direct fixed @ 600mm crs. Stopped smooth for painted finish. (Wet area ceiling 13mm Gib Aqualine)


L03 10mm Gib wall linings stopped smooth for painted finish. (Wet area wall 10mm Gib Aqualine)

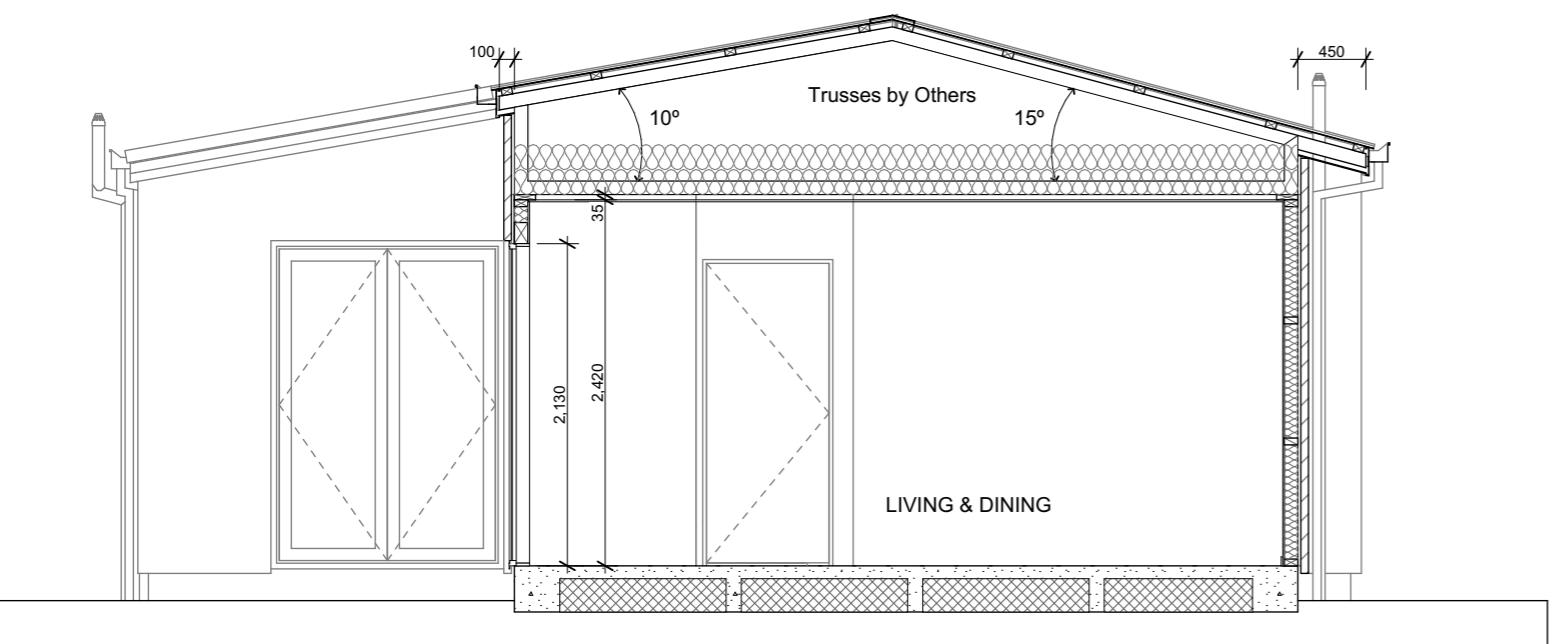


C Section C-C
Scale 1:50


Section Keys

- C01 RCS Graphex 50mm panel with plastered finish on 20mm cavity battens over building underlay on timber framing.
- C02 James Hardie Axon panel on 20mm cavity battens over building underlay on timber framing.
- W01 External walls 90x45mm studs @ 600mm crs, dwangs @ 800mm crs. Top plates 90x45 + 140x35mm.
- W02 External walls 2/90x45mm studs @ 300mm crs, dwangs @ 800mm crs.
- W03 Internal walls 90x45mm studs @ 600mm crs, dwangs @ 800mm crs.
- S01 Ribraft floor slab and foundation.
- T01 Roof trusses as per Truss Design.
- T02 Extended truss top chords / purlins to form raking soffit.
- R01 Colorsteel corrugate roofing over self-supported roof underlay on 70x45mm purlins on trusses.
- R02 Colorsteel Quad gutter on Colorsteel fascia.
- R03 75x55mm Colorsteel downpipes with wall brackets.
- J01 Low E Argon filled double glazed windows in thermally-broken powder coated aluminium frames. H3.1 timber reveals for painted finish.
- J02 Sectional garage door. H3.1 timber reveals for painted finish.
- B01 R2.6 wall insulation batts.
- B02 2 x R3.6 (165mm) double layer ceiling insulation batts. One layer around perimeter where double layer won't fit.
- L01 4.5mm soffit linings for painted finish.
- L02 13mm Gib ceiling linings supported by 35mm Rondo ceiling battens direct fixed @ 600mm crs. Stopped smooth for painted finish. (Wet area ceiling 13mm Gib Aqualine)
- L03 10mm Gib wall linings stopped smooth for painted finish. (Wet area wall 10mm Gib Aqualine)

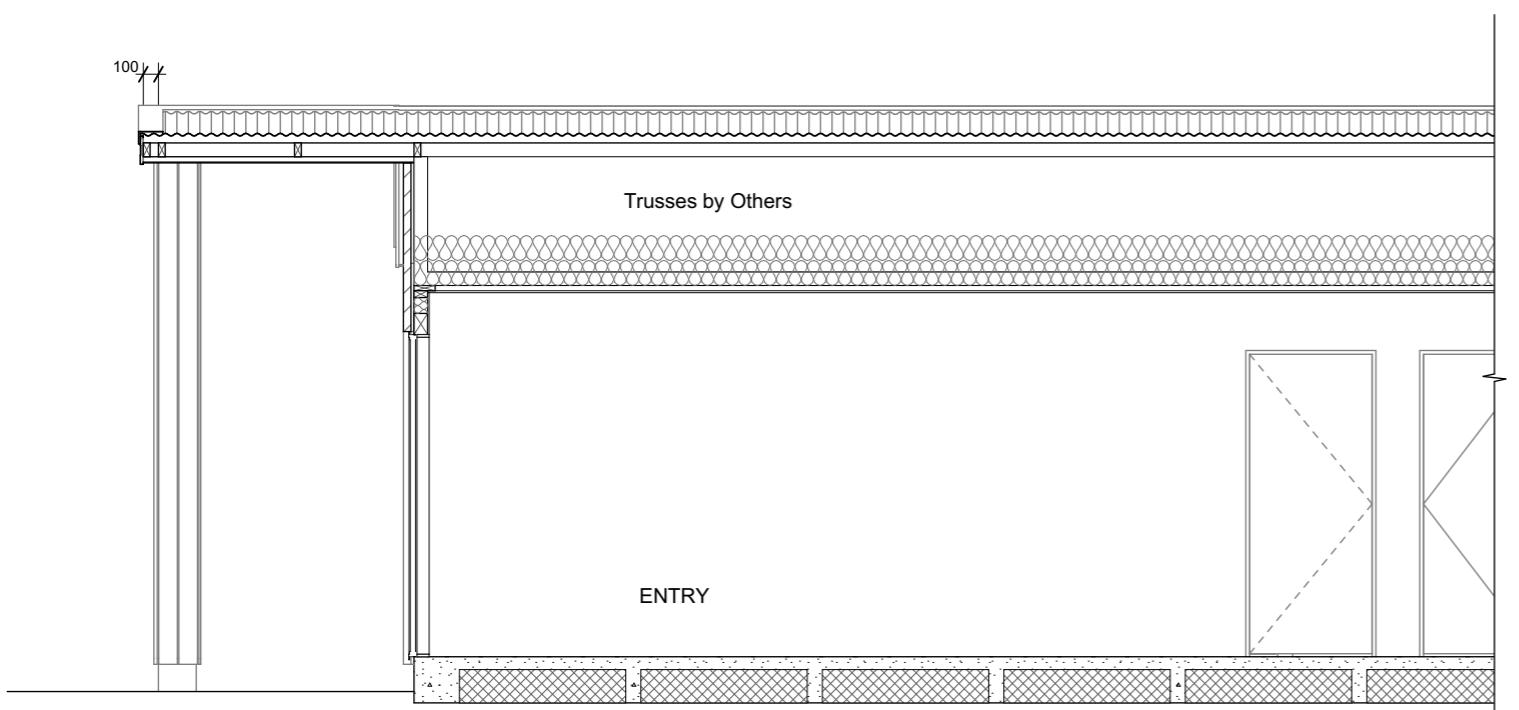


D Section D-D
Scale 1:50

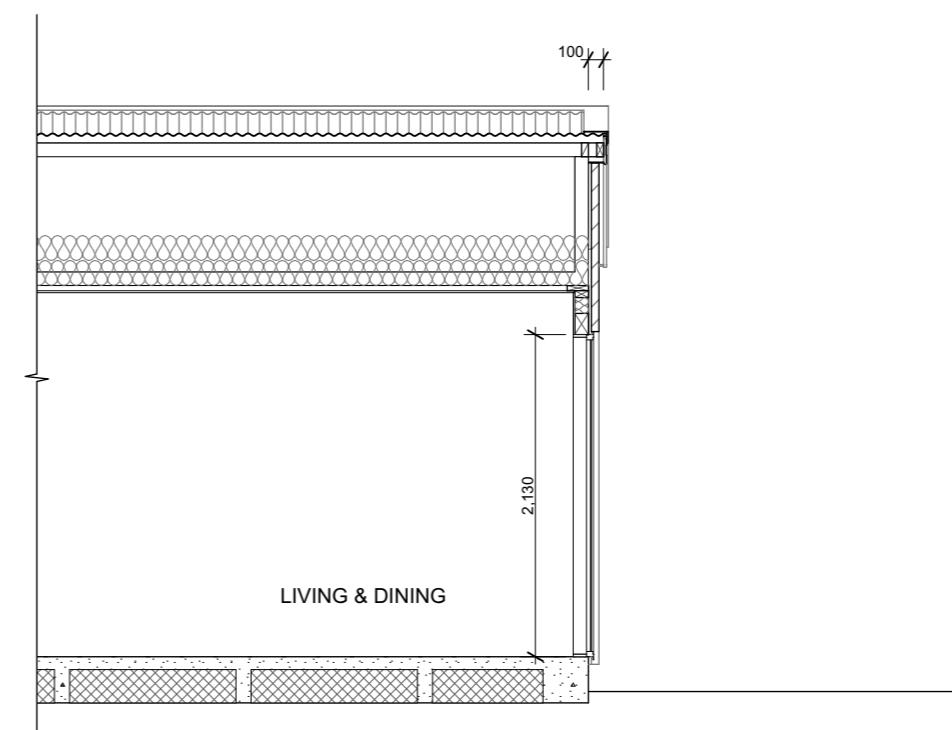




Plants List for Garden Bed

Agapanthus Peter Pan - Dwarf blue Nile lily
 Acacia Limelight - Dwarf wattle
 Choisya Ternata - Mexican orange blossom
 Carex Secta - Makura sedge
 Lavandula angustifolia 'Hidcote' - English Lavender
 Pittosporum little gem
 Thuja occidentalis Smaragd - Emerald Cedar
 Viburnum tinus Eve Price
 Azalea
 Corokia geentys green
 Pseudowintera colorata 'Red Leopard' - Horopito/Pepper tree
 Camellia 'Cinnamon Cindy'
 *Planting species for garden bed are indicative-not to be limited to.

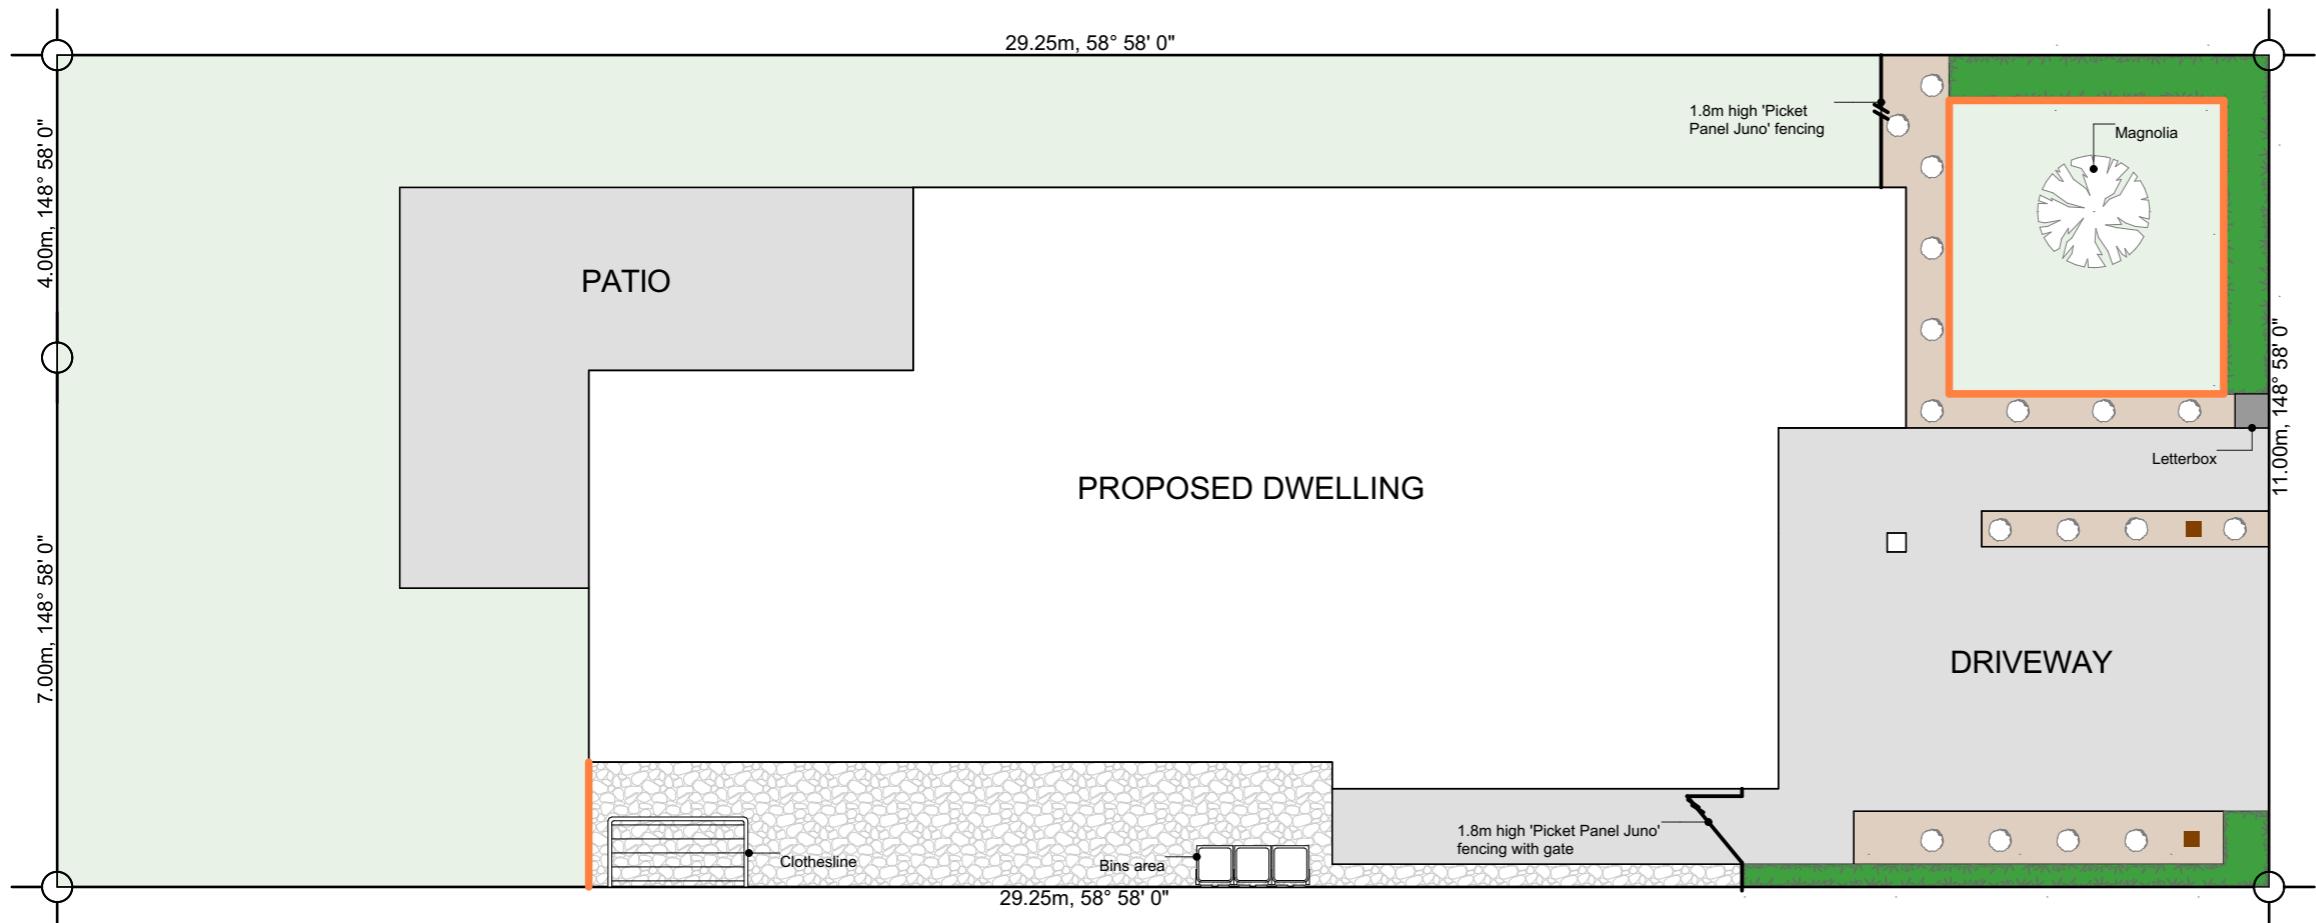


Legends

	Lawn
	Exposed Aggregate
	Stonechip
	Garden Bed with Bark
	Portuguese Laurel - Hedge to be a min. 800mm high at time of planting and a max of 600mm apart (stem to stem)
	Tree - within 2m of road frontage, 2.5m high (at time of planting)
	Macropoda posts 200x200mm with capping, supplied by Arbor Green. To be installed by Oakridge Homes. Mulseal and concrete encase posts, setback 900mm from road boundary and set off the driveway edge by 200mm
	Timber Batten Edging
	'Picket Panel Juno' fence in black

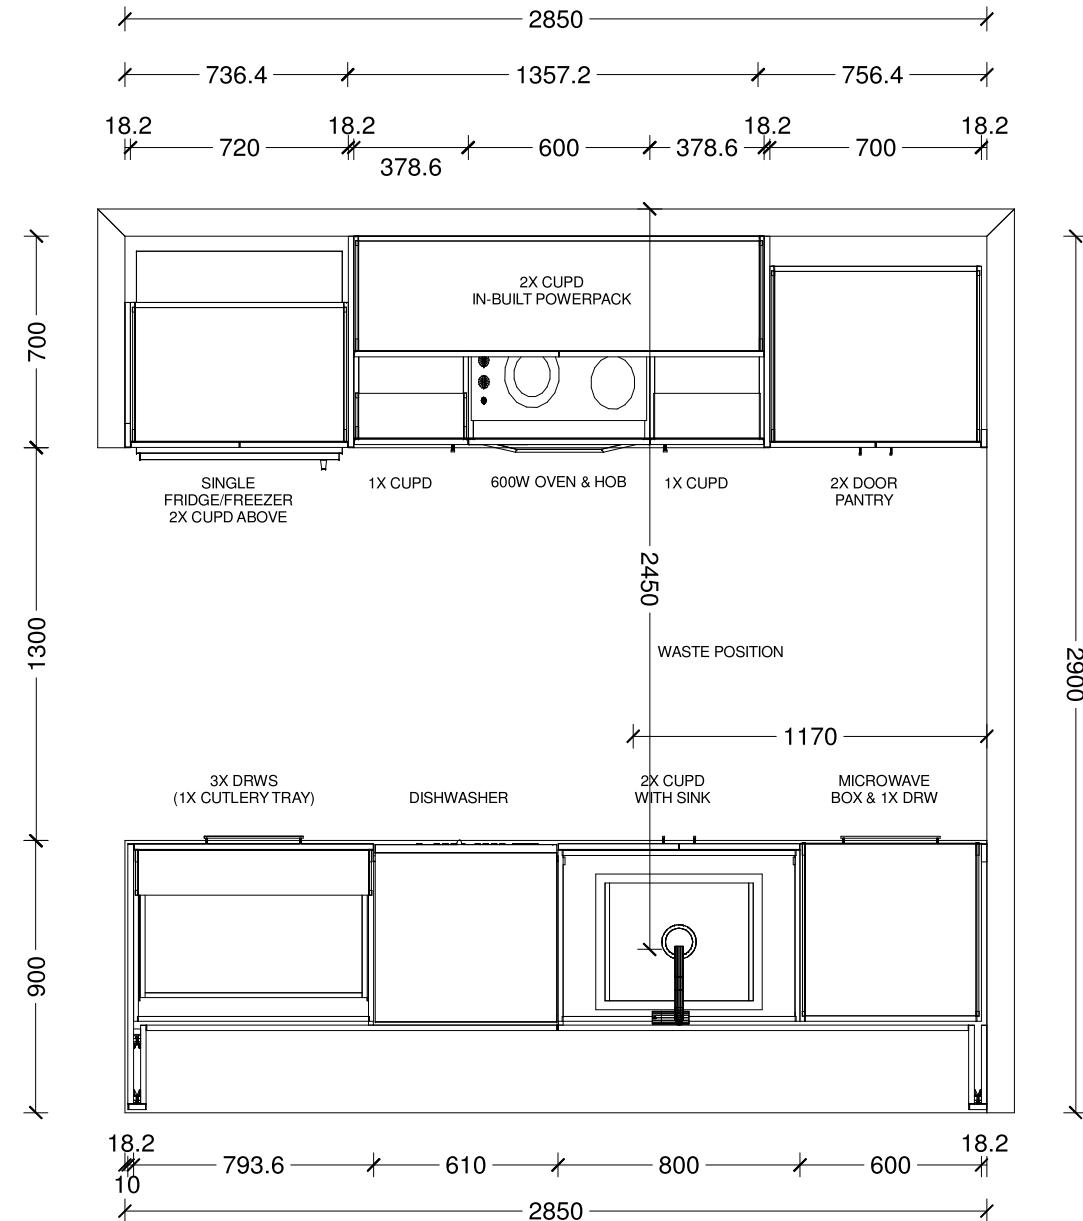




Designer: Sarah Molyneux	Date: 04 Nov 25	Client: Oakridge Homes	BC Ref: Job	Site Address:	Job#: Default
Dwg: Kitchen Plan	Scale: 1 : 25	Customer: The Koa			

TRENDS™
KITCHENS

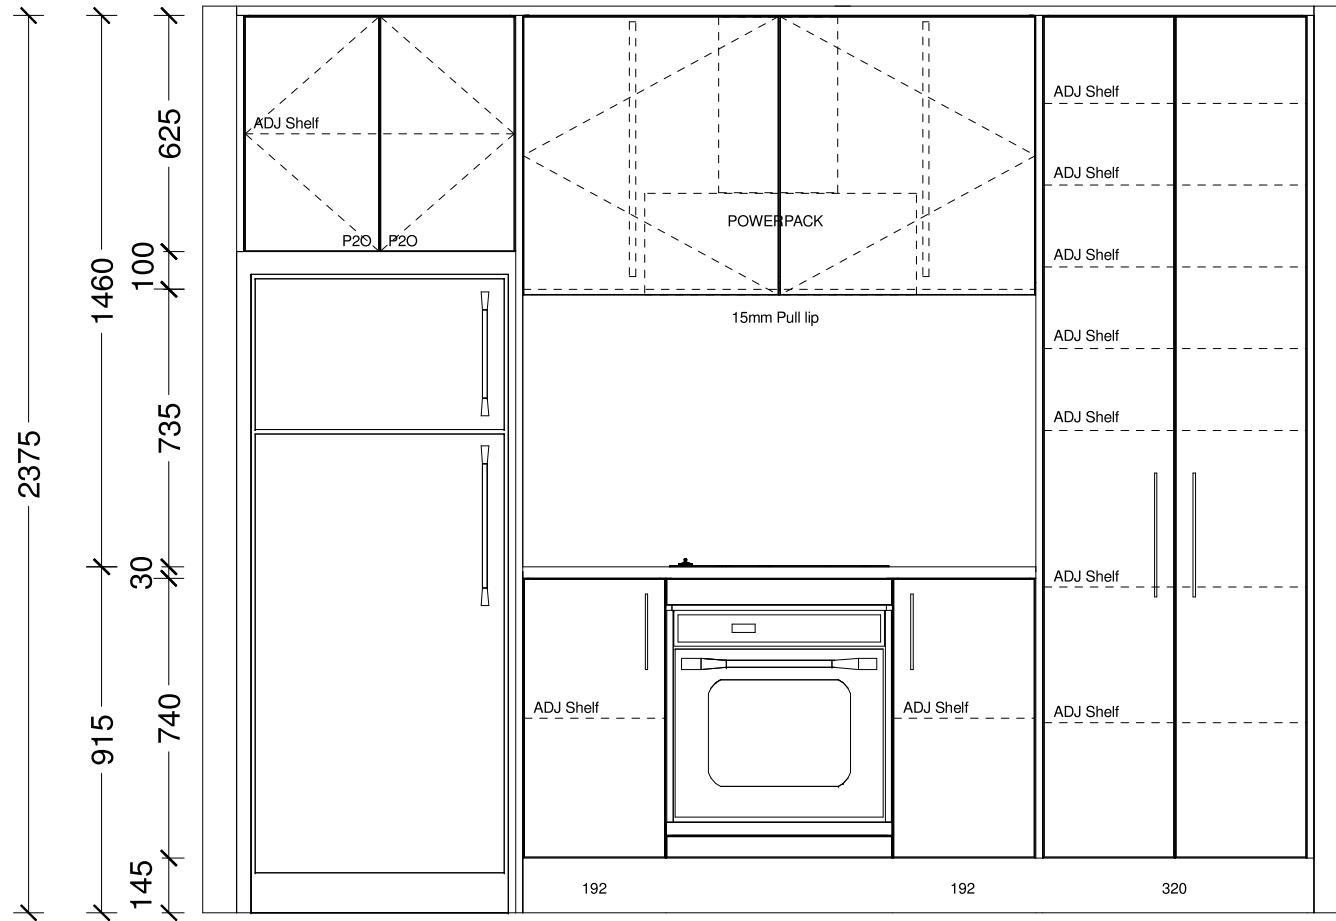


Designer: Sarah Molyneux	Date: 04 Nov 25	Client: Oakridge Homes	BC Ref: Job	Site Address:	Job#: Default	
Dwg: Kitchen Elevation	Scale: 1 : 20	Customer: The Koa				

TRENDS™
KITCHENS

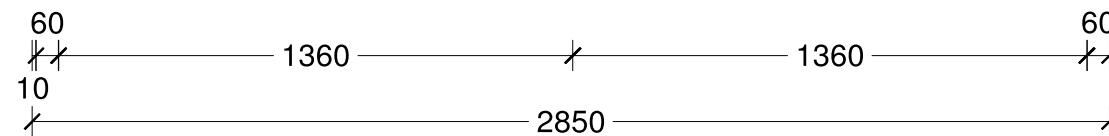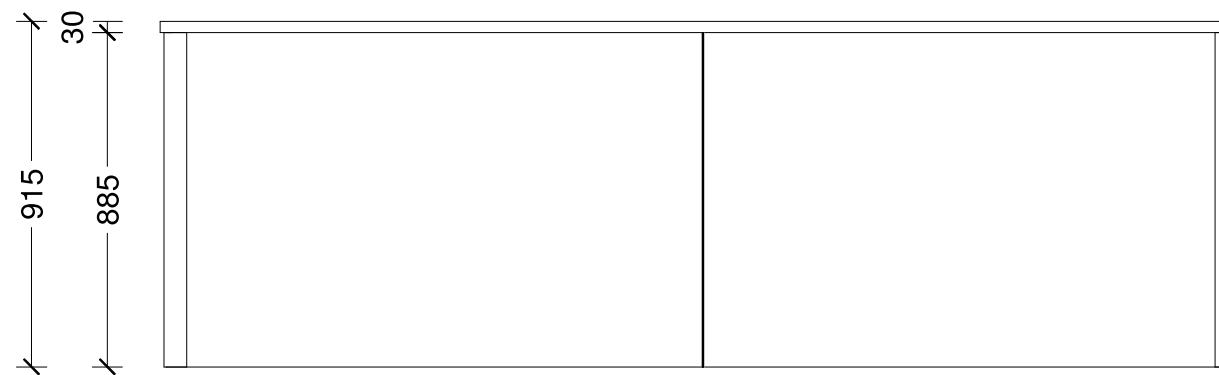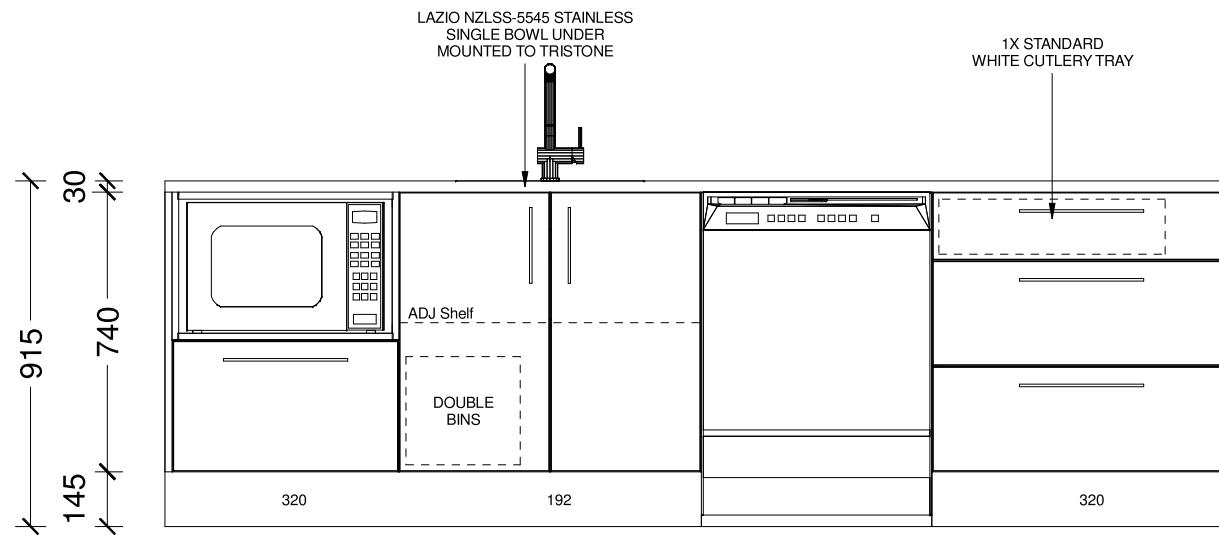

Designer: Sarah Molyneux	Date: 04 Nov 25	Client: Oakridge Homes	BC Ref: Job	Site Address:	Job#: Default	
Dwg: Kitchen Elevation	Scale: 1 : 20	Customer: The Koa				

TRENDS™
KITCHENS

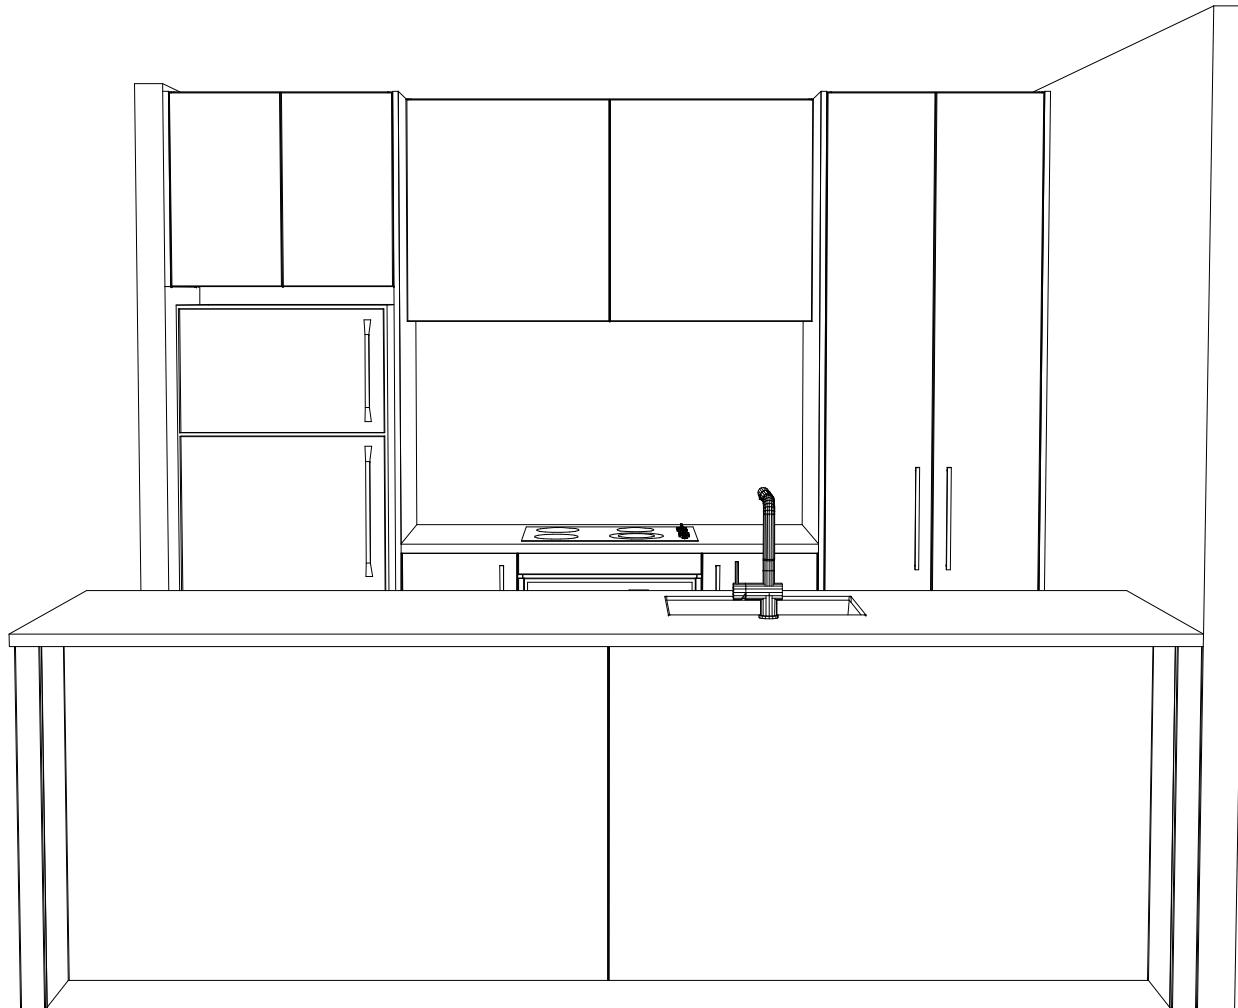

Designer:
Sarah Molyneux
Dwg:
Kitchen 3D Perspective

Date:
04 Nov 25

Client:
Oakridge Homes


BC Ref:
Job

Site Address:
Customer:
The Koa

Job#:
Default

TRENDS™
KITCHENS

This is an original design and must not be released or copied unless applicable fee has been paid or job order placed. All dimensions and size designations given are subject to verification on job site and adjustment to fit job conditions.

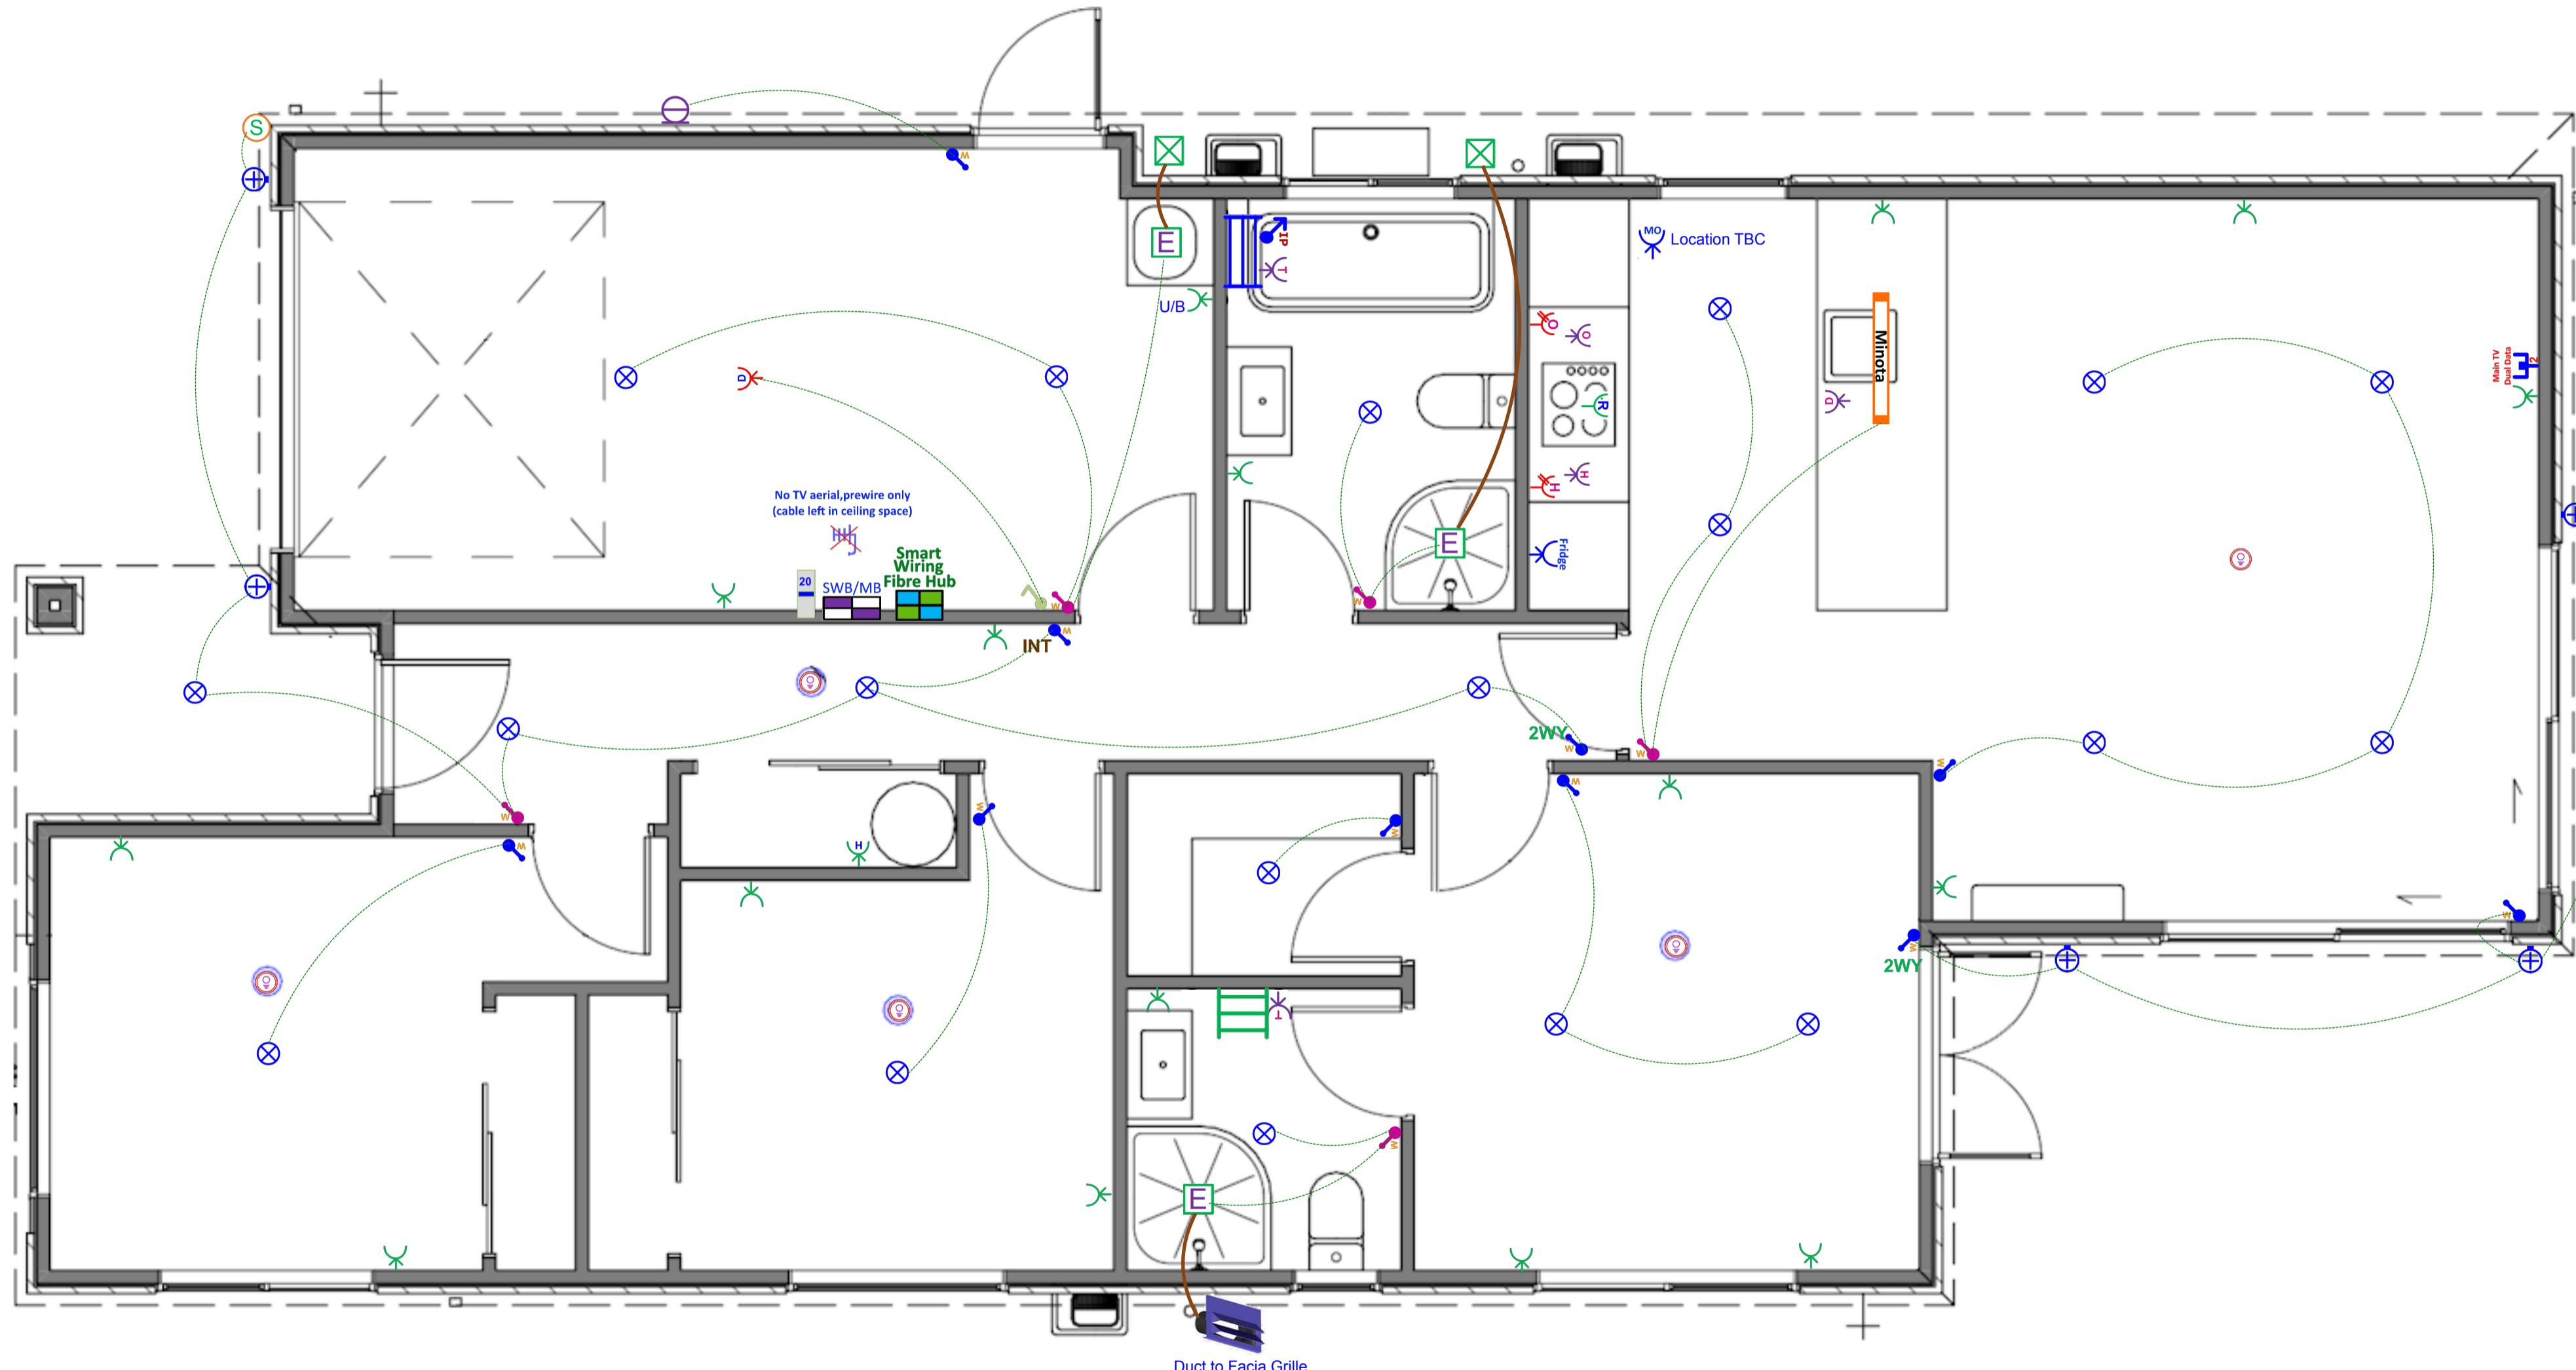

Plan: Option B - The Minota - The Koa V3 (Garage Left) - Electrical Design

Electrical

Item	Total
 Electrical Base with 34-Way Deep Combined Meter Switchboard (Single Phase)	1 EA
 Rangehood Single Switched Power Socket	1 EA
 Tradesave Slim Single Power Socket (White) 10A - Fridge	1 EA
 Tradesave Slim Single Power Socket (White) 10A - Microwave	1 EA
 Tradesave Double Power Socket Horizontal (White) 10A	16 EA
 Tradesave Slim Double Power Socket with Oven Isolator Switch (White) 10A	1 EA
 Tradesave Slim Double Power Socket with Hob Isolator Switch (White) 10A	1 EA
 Tradesave Built-In Oven Hard-Wired Power Connection up to 20A (max)	1 EA
 Tradesave Slim Electric Hob Hard-Wired Power Connection up to 32A (max)	1 EA
 Tradesave Slim Dishwasher Power Socket (White)	1 EA
 Tradesave Garage Door Open/Close Press Switch (White)	1 EA
 Tradesave Slim Garage Door Power Socket (White)	1 EA
 Tradesave Slim Hot Water Cylinder Hard-Wired Power Connection (White)	1 EA
 Air Conditioning Circuit 20A MCB Installation For Heat Pump Circuit	1 EA
 Orca OM866S-10RF Wireless Interconnected Smoke Detector - Photoelectric 10-year battery life	5 EA
 Newtech ST65 Towel Rail 5-Bar Square Ladder 530 x 600mm (Chrome) - Excludes Circuit & Installation	1 EA
 Newtech ST78 Narrow Towel Rail 7-Bar Square Ladder 800 x 450mm (Chrome) - Excludes Circuit & Installation	1 EA
 Tradesave Slim Heated Towel Rail Circuit & Installation (Excludes supply of Towel Rail)	2 EA
 Extractor Fan Inline 150mm with up to 6m of Duct	3 EA
 Extractor Fan External Grille (White)	2 EA
 Fascia Grille (Supplied By Others)	1 EA

Electrical

Item	Total
 External 180° Infrared Movement Surface Mounted Sensor Up to 12M Range, Adjustable 10sec - 15min time delay (White)	1 EA
 Recessed Downlight Prolux DL54 LED 10-Watt 160° Beam (Switchable 3K-4K-6K) White Fascia & Circuit	19 EA
 External LED Up/Down Round 2x 5W Wall Light Ambius AWLSR316LED 3K (Stainless Steel) & Circuit	5 EA
 Bulkhead Wall Light Robus Ohio LED 12W IP54 Oval Bulkhead c/w White & Black Trims & Circuit	1 EA
 Tradesave Slim Light Switch 1-Gang (White)	10 EA
 Tradesave Slim Light Switch 2-Gang (White)	5 EA
 Excel Life White IP Rated Light Switch 1 Gang	1 EA
 2-Way Light Circuit	2 EA
 Tradesave Slim 3-way Intermediate Switching Light Circuit	1 EA
 Smart Wiring Base 20" Hub 12 Port with Fibre Optic Pathway and Power Circuit	1 EA
 No TV Aerial, Prewire Only (cable left in ceiling space)	1 EA
 SC261302 (Oak)-25 - Tradesave Slim Main UHF TV/Dual Network Data Sockets Cat-6 (White)	1 EA

Kitchen Pendants

Item	Total
 Pendant Light - Minota 1.5m Pendant LED (Black) & Circuit	1 EA

In the Area

About Arbor Green

Arbor Green has everything that makes up a flourishing neighbourhood. Streets, landscaping and amenities that have been purposefully designed to bring people together and enhance everyday wellbeing.

Once complete, Arbor Green will have 1200 new homes built, a primary school and a central neighbourhood precinct that create two main gathering points, while multiple parks, pathways and cycleways ensure every resident can get around with safety and ease.



Rolleston and Surrounding Areas

Living in Arbor Green provides you with an open gateway to everything the Selwyn region has to offer.

Rolleston is Canterbury's second largest urban centre. Home to growing businesses, purpose-built facilities, high quality schools and a bevy of shops and eateries, life here is vibrant, easy and fun.

You'll be close to all those urban conveniences that make life easy. There are plenty of work and education opportunities nearby and Christchurch is just 20 minutes down the road. Head a little further afield and Canterbury's mountains, lakes and beaches are yours to discover.



P: (03) 977 2832

E: info@oakridgehomes.co.nz

oakridgehomes.co.nz



Why Choose an Oakridge Home?

Oakridge Homes is a locally owned Canterbury company with decades of experience. We are Canterbury's second largest residential builder delivering 200 homes per year with a proven track record of completing over 400 homes for happy homeowners in the region. Oakridge is a small team of fifteen, each of us working diligently to achieve the company goal of delivering quality homes as efficiently and stress free as possible.

All Oakridge house and land packages are competitively priced offering true value for money including turnkey funding, meaning you pay a 10% deposit and the balance the day you get your keys. In our experience this is the preferred contract method when securing finance and a service we offer as a standard inclusion. We work closely with our contractors and suppliers to get the best product for the best cost which is reflected in our all-inclusive package pricing.

At Oakridge we are extremely proud of the relationships we have built with local tradesmen and suppliers, ensuring quality is delivered every time. We deal with one longstanding company per

element of the build which has helped us achieve our average build time of 17 weeks. We are very thankful to everyone who makes an Oakridge home come to life, many of us working alongside one another for over ten years.


Our team has put immense effort in to streamlining the consenting process by working alongside the local councils and have formed great relationships with the team leaders guaranteeing our consents are handled as efficiently as possible. Oakridge has a reputation for providing quality documentation for our consent applications which helps ensure we receive your building consent in a timely manner.

We understand that customers value quality and transparency which has been a major focus for Oakridge Homes, we offer a range of fixed price turnkey house and land packages that suit the majority of homebuyers. From the letterbox numbers to the window coverings – an Oakridge home truly is fully inclusive and move in ready when handover day comes. There are no hidden surprises and nothing for you to do but sit back and trust us to build your home.

Oakridge Homes has taken steps to ensure your home is here to stand the test of time by including:

- Master Build 10-Year Guarantee
- 1 year warranty period
- Exceeds Healthy Homes Standards
- LVL framing (laminated veneer lumber) more durable and less likely to warp
- RibRaft foundation system
- Quality cladding options
- Thermally broken window joinery
- Increased carpet underlay thickness
- Tri-Stone benchtops for easy maintenance
- Full height kitchen joinery to avoid dust collection
- Full length tiled splashback to kitchen
- Bosch appliances
- Exposed aggregate driveways and patios
- Insulated garage and garage door

The Oakridge Journey

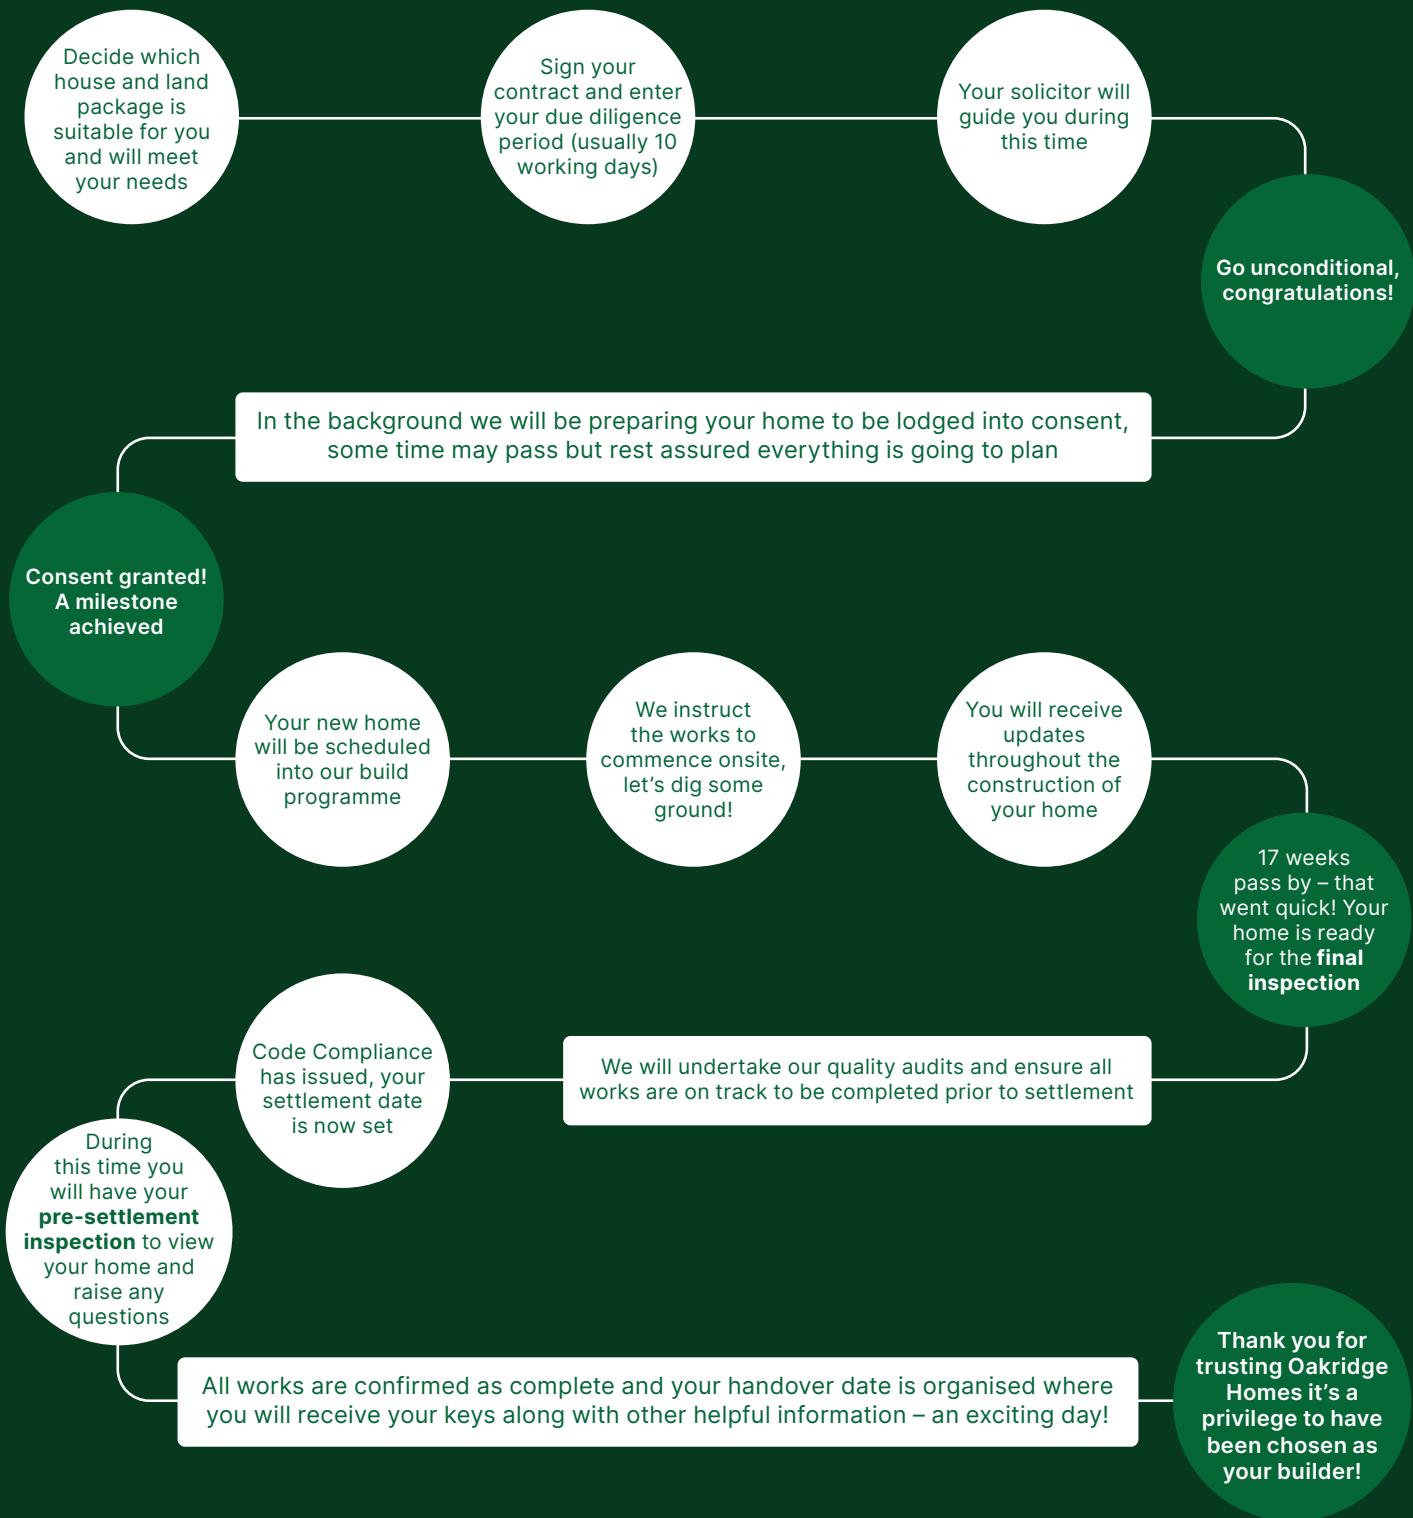

If you'd like more information on one of our listings or want to learn more about the process of buying an Oakridge home, get in touch.

P: (03) 977 2832

E: info@oakridgehomes.co.nz

oakridgehomes.co.nz